

# STEAMIST®

## Steambath Control

Model: TSC-450

### Product Information – TSC-450 with WiFi

2 years parts warranty

Finger-light touchscreen operation

2 memory settings

Programmable Time and Temperature.

Temperature range 50°F min to 125°F max.

Time up to 60 minutes.

Operates AromaSense, AudioSense, ChromaSense and ShowerSense options.


Digital display of ambient and set temperature.

**Dimensions:** 4½" x 4½"

**Package Includes:** Control, 6-Pin Coupler, Steamhead (Delivers 360-Degree Steam Dispersion), Strain Relief Clamp, Silicone Sealant, Installation and Operating Instructions.

### Required Electrical Service:

Low-voltage connection from TSG generator via multi-conductor cable (supplied with Steam Generator).

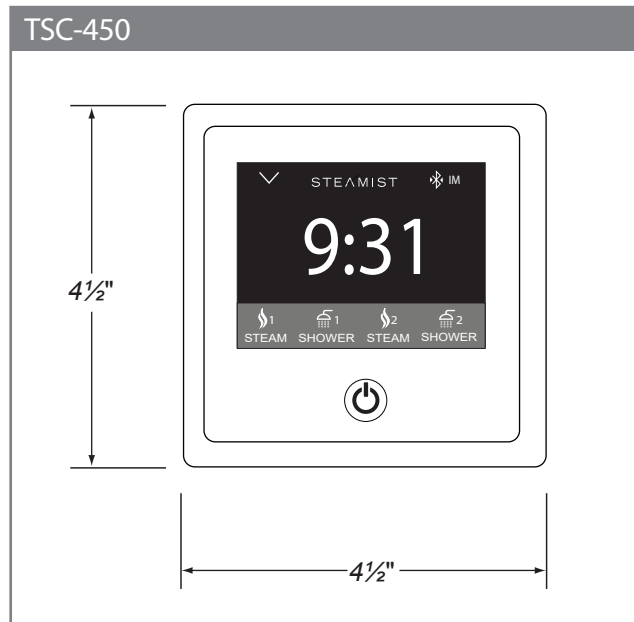

## Notes

### Installation Notes:

Surface Mount - 1½" hole required.

Must mount inside the steam room.

Steamist recommends that the multi-conductor cable be run through ¾" conduit to protect cable from damage and to facilitate easy replacement.

Mount control near seating area and not above steamhead.

### Rough-in Notes:

Control should be mounted 48" above the floor.

Steamhead to be mounted 12" to 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.

### Product No. - Finishes:

Contemporary

450-PC - Polished Chrome

450-PN - Polished Nickel

450-BN - Brushed Nickel

450-BB - Brushed Bronze

450-PG - Polished 24K Gold

450-ORB - Oil-Rubbed Bronze

Traditional

450T-PC - Polished Chrome

450T-PN - Polished Nickel

450T-BN - Brushed Nickel


450T-BB - Brushed Bronze

450T-PG - Polished 24K Gold


450T-ORB - Oil-Rubbed Bronze

## Package Contents

Strain Relief Clamp



Silicone Sealant




360-Degree Diffusing Steamhead

6-Pin Coupler



Wiring Layout with Spa Options

Model: TSC-450

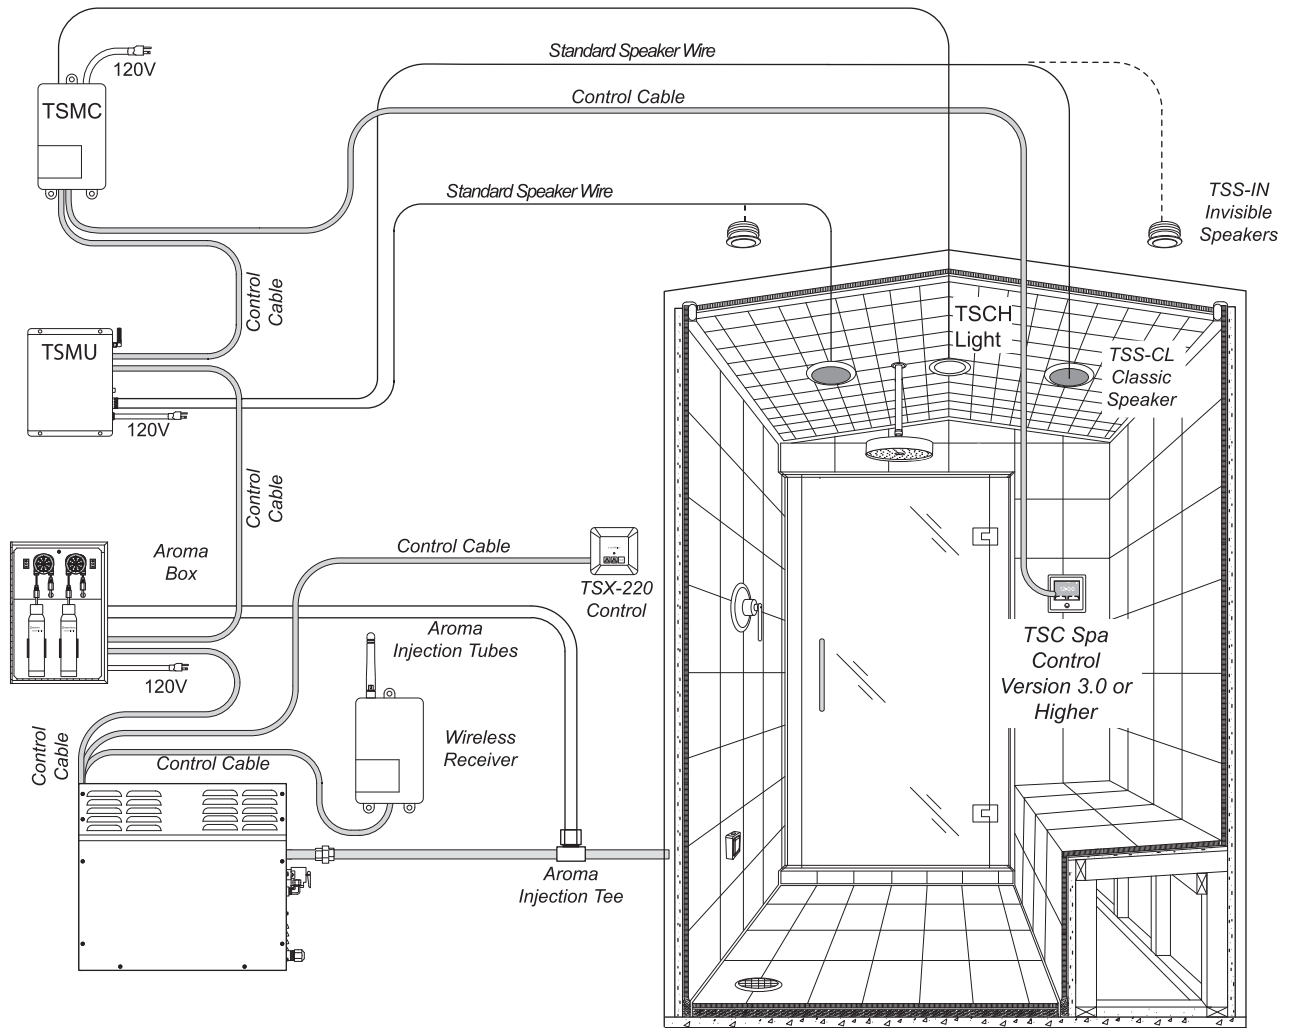

Shown with other Spa Options